



DTAX2 SERIES

TELESCOPIC ARTICULATING
INSULATED OR NON-INSULATED
COMPACT DESIGN AND STOWING!



DTAX2-42 PICTURED

SPECIFICATIONS

	DTAX2-44	DTAX2-42	DTAX2-39
WORKING HEIGHT	49'	47'	44'
SIDE REACH	30'	28'	28'
APPROX. STOWED TRAVEL HEIGHT	10'	10'	10'
HEIGHT TO BOTTOM OF PLATFORM	44'	42'	39'
BASKET CAPACITY	350#	400#	400#
APPROX. LIFT WEIGHT	2585#	2450#	2235#
ARTICULATING ARM TRAVEL	-5° to 81°	-5° to 81°	-5° to 81°
MAIN BOOM TRAVEL	-25° to 75°	-25° to 75°	-25° to 75°
EXTENSION TRAVEL	122.5"	110.5"	110.5"

Dur-A-Lift Inc. reserves the right to improve models and change specifications without notice or obligation. Dur-A-Lift equipment meets or exceeds all applicable ANSI Standards as of the date of manufacture.

TELESCOPIC ARTICULATING, PERSONNEL

WORKING HEIGHT UP TO 49'

SIDE REACH TO 30'

UP TO 400 POUND BASKET CAPACITY

180-DEGREE BASKET ROTATOR

COMPACT DESIGN AND STOWING

OPTIONS AVAILABLE FOR USE WITH 9' BODY

INSULATED (DTAX2) OR NON-INSULATED (DTAX2S)



WE SPEAK BUCKET TRUCK

DUR-A-LIFT.COM/GUIDE

BROWSE ALL MODEL OPTIONS ONLINE!



DTAX2 SERIES

STANDARD

CONTROLS: Proportional controls; lower controls with override located at the turntable; engine start/stop from the basket; individual control levers.

HYDRAULIC SYSTEM: Rated pressure is 2200 PSI; operating pressure is 2000 PSI; open center hydraulic system; 180° rotating basket.

MECHANICAL SYSTEM: Telescoping and articulating boom action; offset main boom reduces travel height; shear ball rotation driven; fully enclosed worm gear box; non-continuous rotation; insulated extension boom 46kv (DTAX2); 24"x24"x42" basket; 110v outlet at upper controls (DTAX2S).


OPTIONAL

Single hand joystick upper control; outrigger or torsion bars; 12v D.C. backup; fixed basket position (side or end); basket offered in various sizes and configurations; basket liner 50kv (DTAX2); main boom fiberglass insert (DTAX2); chassis isolator art boom fiberglass insert (DTAX2); continuous rotation; tool trays of various sizes; basket and control cover; upper and lower hydraulic tool circuits; tail shelf with walkup.



Negative boom angle allows for ground level access from the basket.

REACH DIAGRAM

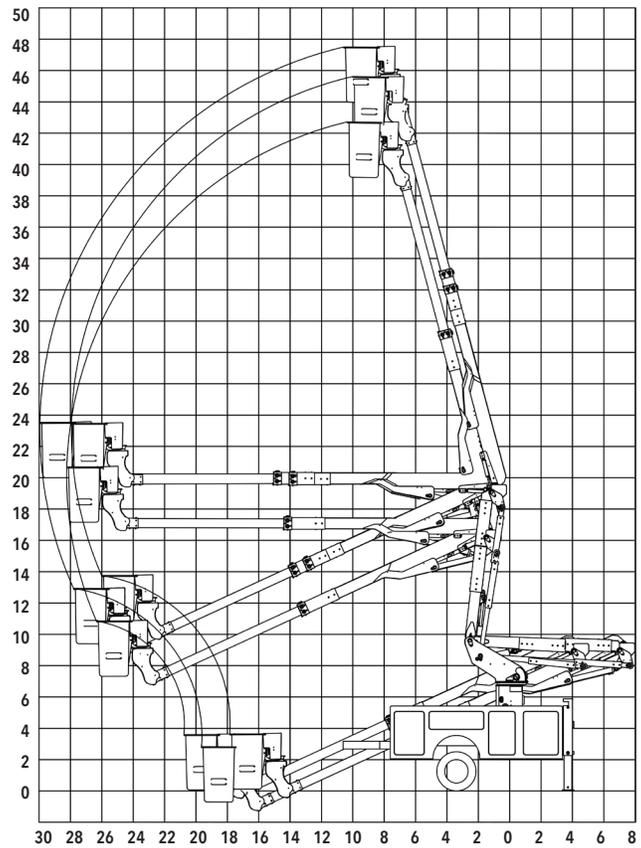

CHASSIS REQUIREMENT, MIN.: 15,000 GVWR (DTAX2-39/42); 19,000 GVWR (DTAX2-44)
CHASSIS CAB TO AXLE REQUIREMENT, MIN.: 60"-84" (DTAX2-39); 84" (DTAX2-42/44)



Reach up to 47 feet without the use of outriggers with the DTAX2-42



READ MORE



Fiberglass or aluminum 24"x24"x42" basket with walk-in option

Ask about larger basket options,

BUILT FOR YOU

Ask about available chassis, body, tailshelf, and basket options.

INSULATED/NON-INSULATED

Available in insulated or non-insulated formats. (Full pressure controls)

DTAX2: insulated (Category C or D)

DTAX2S: non-insulated



DUR-A-LIFT, INC., 2002 KINGBIRD AVENUE, PO BOX 31, GEORGE, IOWA 51237
1-877-438-7254 | SALES@DUR-A-LIFT.COM | DUR-A-LIFT.COM