

UTV TRACKED LIFT

Models: DLT2-60, DPM2-52, DPM-52

DUR-A-LIFT®



DPM2-52DP PICTURED

WWW.DUR-A-LIFT.COM

SPECIFICATIONS

	DLT2-60	DPM2-52	DPM-52
WORKING HEIGHT	67'*	59'*	57'
SIDE REACH	39'2"	31'6"	31'6"
APPROX. STOWED TRAVEL HEIGHT	9'8"	9'3"	9'3"
HEIGHT TO BOTTOM OF PLATFORM	60'	52'	52'
BASKET CAPACITY (MH BASKET)	400#	400#	400#
BASKET CAPACITY, USING JIB (DU BASKET)	400#	400#	400#
BASKET CAPACITY, NOT USING JIB (DU BASKET)	550#	550#	550#
APPROX. LIFT WEIGHT	5950#	4400#	4400#
ARTICULATING ARM TRAVEL	0 to 91	0 to 75	0 to 75
MAIN BOOM TRAVEL	-26 to 75	-30 to 75	-30 to 75
EXTENSION TRAVEL	134"	120"	120"

- WORKING HEIGHT UP TO 67'; SIDE REACH TO 39'2"
- MATERIAL HANDLING OR DOUBLE-PERSON
- TOP OR SIDE-MOUNTED JIB LIFTS UP TO 1000#
- 180-DEGREE BASKET ROTATOR
- OPTIONAL BASKET ELEVATOR (DPM2 & DLT2)

**CLIMB A
40 DEGREE
SLOPE
DRIVE
THROUGH
UP TO 3 FEET
OF WATER**



DUR-A-LIFT®
WE SPEAK BUCKET TRUCK

Dur-A-Lift Inc. reserves the right to improve models and change specifications without notice or obligation. Dur-A-Lift equipment meets or exceeds all applicable ANSI Standards as of the date of manufacture.

*Achievable with optional basket elevator

UTV TRACKED LIFT

Models: DLT2-60, DPM2-52, DPM-52

DUR-A-LIFT
WE SPEAK BUCKET TRUCK

THE ULTIMATE TRACKED LIFT.

This machine is able to climb a 40 degree slope and can wade through 3 feet of water. Can be used as a single person material handling basket or as a double person personnel lift. Vehicle weight 16,500 lbs; 2.5 PSI ground pressure; 29" tracks. Get where other machines can not go with the tracked aerial lift!



READ MORE



STANDARD

Proportional controls; lower override controls; engine start/stop from basket; basket access from ground; compensated upper boom; insulated Category "C"; hydraulic basket leveling; continuous rotation; high electrical resistant joystick controls

BASKET OPTIONS


MH BASKET: Single person, material handling; top mounted (DLT2, DPM2) or side mounted (DPM) jib and winch lifts up to 1000#; upper and lower winch control; 400# basket capacity; 24" X 30" fiberglass basket; upper and lower winch control; 180° basket rotator

DU BASKET: Dual configuration; double person, personnel or single person, material handling; top mounted jib and winch lifts up to 1000#; 550# basket capacity when not using winch; 400# basket capacity when using winch; 24" X 42" fiberglass basket; upper and lower winch control; 100° basket rotator


DP BASKET: Double person, personnel; 600# basket capacity; 24" X 48" fiberglass basket; 180 degree basket rotator

OPTIONAL


22" basket elevator (DLT2, DPM2); basket liner for fiberglass baskets; tool circuits; fiberglass main and articulating booms; D.C. backup system; 180° basket rotator (DU basket)

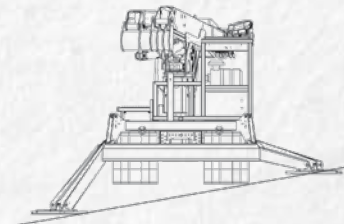


Level lift on 10 degree side slope

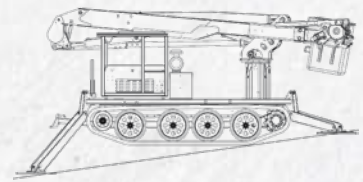

Level lift on 8 degree front/rear slope



Maximum water depth of 3 feet

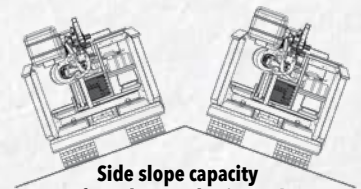

Side slope capacity of -15 degrees horizontal



WWW.DUR-A-LIFT.COM

DUR-A-LIFT, INC., 2002 KINGBIRD AVENUE, PO BOX 31, GEORGE, IOWA 51237
WWW.DUR-A-LIFT.COM | 1-877-4DURALIFT | SALES@DUR-A-LIFT.COM