



URBAN FORESTRY

**TELESCOPIC ARTICULATING
MARINE-GRADE ALUMINUM CHIPPER BODY**
AVAILABLE IN THREE SIZES!



SHOWN: DTAX2-45 AERIAL WITH 9'9" CHIPPER BOX WITH 9'9" CHIPPER BOX

SPECIFICATIONS

	DPM2 SERIES		DTAX2 SERIES	
	DPM2-53	DTAX2-45	DTAX2-40	
WORKING HEIGHT	60'*	50'	45'	
SIDE REACH	31'6"	30'	28'	
APPROX. STOWED TRAVEL HEIGHT	12'4"	11'3"	11'2"	
HEIGHT TO BOTTOM OF PLATFORM	54'	45'	40'	
BASKET CAPACITY	600#	350#	400#	
APPROX. LIFT WEIGHT	4400#	2585#	2450#	
ARTICULATING ARM TRAVEL	0° to 75°	-5° to 81°	-5° to 81°	
MAIN BOOM TRAVEL	-30° to 75°	-25° to 75°	-25° to 75°	
EXTENSION TRAVEL	120"	122.5"	110.5"	

Dur-A-Lift Inc. reserves the right to improve models and change specifications without notice or obligation. Dur-A-Lift equipment meets or exceeds all applicable ANSI Standards as of the date of manufacture.

*Maximum height achievable with addition of the optional 22" basket elevator.

DPM2 SERIES

ADDED REACH & LOAD CAPACITY

WORKING HEIGHT UP TO 60'; SIDE REACH TO 31'6"
11'9" ALUMINUM CHIPPER BOX

DTAX2 SERIES

COMPACT UNIT WITH A BIG REACH

UNDER CDL OPTIONS

WORKING HEIGHT UP TO 50'; SIDE REACH TO 30'
7'6" & 9'9" ALUMINUM CHIPPER BOX OPTIONS

**WE SPEAK
BUCKET TRUCK**

DUR-A-LIFT.COM/GUIDE

BROWSE ALL MODEL OPTIONS ONLINE!



URBAN FORESTRY

DPM2

Models: DPM2-53

STANDARD

Proportional controls; lower override controls; engine start/stop from basket; basket access from ground; compensated upper boom; insulated models available in category C or D; hydraulic basket leveling; continuous rotation; joystick and lockout controls; 180° basket rotator; 24"x 30" fiberglass basket, 600# capacity

OPTIONAL

High electrical resistant controls; outriggers; basket liner for fiberglass baskets; fiberglass main and articulating booms; tool circuits; D.C. backup system; 22" basket elevator; non-insulated versions available (DPM2S); 110 v outlet at basket (non-insulated only)

DTAX2

Models: DTAX2-45, DTAX2-40

STANDARD

CONTROLS: Proportional controls; lower controls with override located at the turntable; engine start/stop from the basket; individual control levers


HYDRAULIC SYSTEM: Rated pressure is 2200 PSI; operating pressure is 2000 PSI; open center hydraulic system; 180° rotating basket

MECHANICAL SYSTEM: Telescoping and articulating boom action; offset main boom reduces travel height; shear ball rotation driven; fully enclosed worm gear box; non-continuous rotation; insulated extension boom 46 kV (DTAX2); 24" x 24" basket, 350# capacity; 110V outlet at upper controls (DTAX2S).

OPTIONAL


Single hand joystick upper control; outrigger or torsion bars; 12 volt DC backup; fixed basket position (side or end); basket offered in various sizes and configurations; basket liner 50 kV (DTAX2); main boom fiberglass insert (DTAX2); chassis isolator art boom fiberglass insert (DTAX2); continuous rotation; tool trays of various sizes; basket and control cover; upper and lower hydraulic tool circuits; lower stow/dump control; special paint color.

REACH DIAGRAM (DPM2)

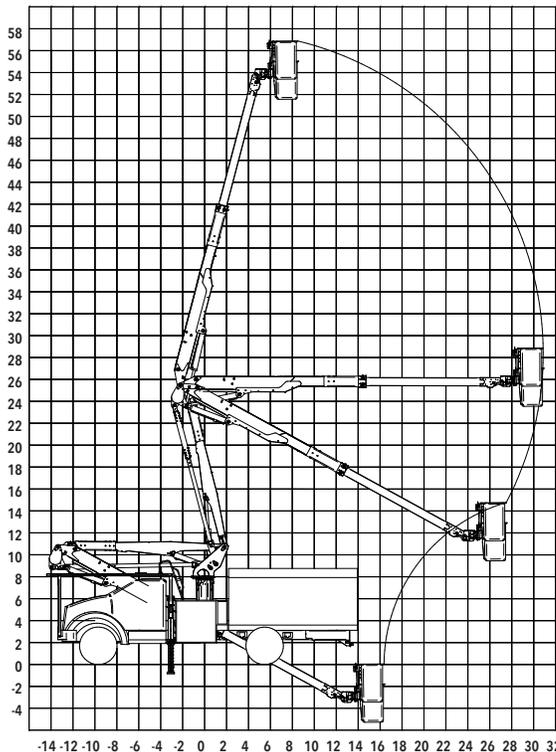

Reach up to 60' with optional basket elevator

REACH DIAGRAM (DTAX2)

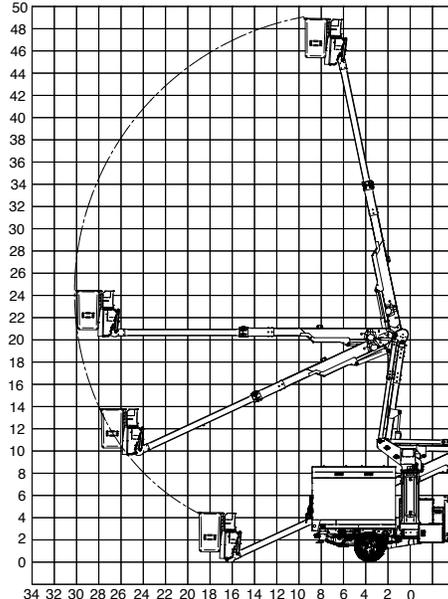

END HUNG BASKET CONFIGURATION SHOWN. SUBTRACT 2 FT FOR ACCURATE SIDE REACH VALUE FOR SIDE HUNG BASKET.



CHIPPER BODY DIMENSIONS: 11'9" (L) X 96" (W) 54" (H)



CHIPPER BODY DIMENSIONS: 9'9" (L) X 96" (W) 54" (H)



CHIPPER BODY DIMENSIONS: 7'6" (L) X 96" (W) 54" (H)

	DPM2-53	DTAX2-45		DTAX2-40	
WORKING HEIGHT	60'*	50'	50'	45'	45'
CHASSIS, CLASS REQ.	Class 6	Class 6	Class 5+	Class 6	Class 5+
CHIPPER BODY LENGTH	11'9"	9'9"	7'6"	9'9"	7'6"

*With optional basket elevator



DUR-A-LIFT, INC., 2002 KINGBIRD AVENUE, PO BOX 31, GEORGE, IOWA 51237
1-877-438-7254 | SALES@DUR-A-LIFT.COM | DUR-A-LIFT.COM