



SPLICER BUILD

TELESCOPIC ARTICULATING AERIAL
CLIMATE-CONTROLLED WORKSPACE
A COMPLETE FIBER SPLICING SOLUTION!



DTA2S-37PC PICTURED

SPECIFICATIONS

DTA2-37


WORKING HEIGHT	42'
SIDE REACH	26'5"
APPROX. STOWED TRAVEL HEIGHT	12'
HEIGHT TO BOTTOM OF PLATFORM	37'
BASKET CAPACITY	400#
APPROX. LIFT WEIGHT	2725#
ARTICULATING ARM TRAVEL	-6 to 83°
MAIN BOOM TRAVEL	-25° to 75°
EXTENSION TRAVEL	78"

Dur-A-Lift Inc. reserves the right to improve models and change specifications without notice or obligation. Dur-A-Lift equipment meets or exceeds all applicable ANSI Standards as of the date of manufacture.

SCAN FOR A VIDEO
TOUR OF THIS LIFT



WORKING HEIGHT UP TO 42'; SIDE REACH TO 36'5"
FIBERGLASS CRAWL-THRU BASKET; 400#CAPACITY
FULLY INSULATED E-DRIVE SPLICING LAB
INSULATED (DTA2); NON-INSULATED (DTA2S)

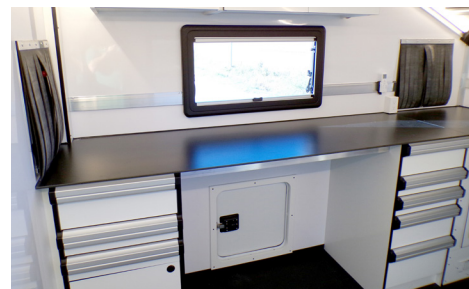

WE SPEAK BUCKET TRUCK

BROWSE ALL MODEL OPTIONS ONLINE!

DUR-A-LIFT.COM/GUIDE

SPLICER BUILD

A COMPLETE FIBER SPLICING SOLUTION

From overhead access to a climate-stable splicing environment, the Splicer Build delivers everything fiber technicians need—on one truck, in one solution.

AERIAL LIFT FEATURES

Working Performance

- Working height up to 42'; side reach up to 26'5"
- 24" x 24" fiberglass crawl-thru basket; 24" x 30" upgrade option
- 400 lb basket capacity
- 370° rotation; continuous rotation optional with full pressure controls
- Engine start/stop from basket
- Maintenance-free bushings
- One-year parts & labor warranty. Ask about extended warranty.

Control Options

- **Proportional CANbus (PC)** – Smooth, precise electronic control with optional joystick.
- **Full Pressure (FP)** – Reliable open-center hydraulic controls with options like lower remote controls, start/stop switch, power stow, and throttle advance.

FIBER SPLICING BODY

Composite Construction

- Intelli-Core™ composite body
- R11 floor, R9 walls, R15 roof
- Welded aluminum sub-frame
- Non-skid flooring
- Walk-in rear door



READ MORE

Climate-Controlled Interior

- 15K BTU A/C with heat pump
- 1500 W electric heater
- Electric reversing roof fan
- Comfortable, stable, all-season temperature control.

Clean, Quiet Power


- 10.2 kWh lithium E-Drive system (expandable with 5.1 kWh module)
- 45-amp compatible power center
- 30-amp shore-power plug
- Bluetooth switching
- Generator-free, emission-free operation.

Lighting & Connectivity

- All-LED interior and exterior lighting
- Perimeter work lights
- USB charging ports, 110V outlets, 12V outlets
- Beacon lights, strobes, rear traffic advisor

Smart Storage & Access

- Multiple cabinet layouts
- Base and upper storage options
- Dedicated 16" x 16" cable entry door
- Optional: steps, grab handles, conduit tubes, mudflaps, tool boxes



TALL CEILING HEIGHT COMES STANDARD!



DUR-A-LIFT, INC., 2002 KINGBIRD AVENUE, PO BOX 31, GEORGE, IOWA 51237
1-877-438-7254 | SALES@DUR-A-LIFT.COM | DUR-A-LIFT.COM